



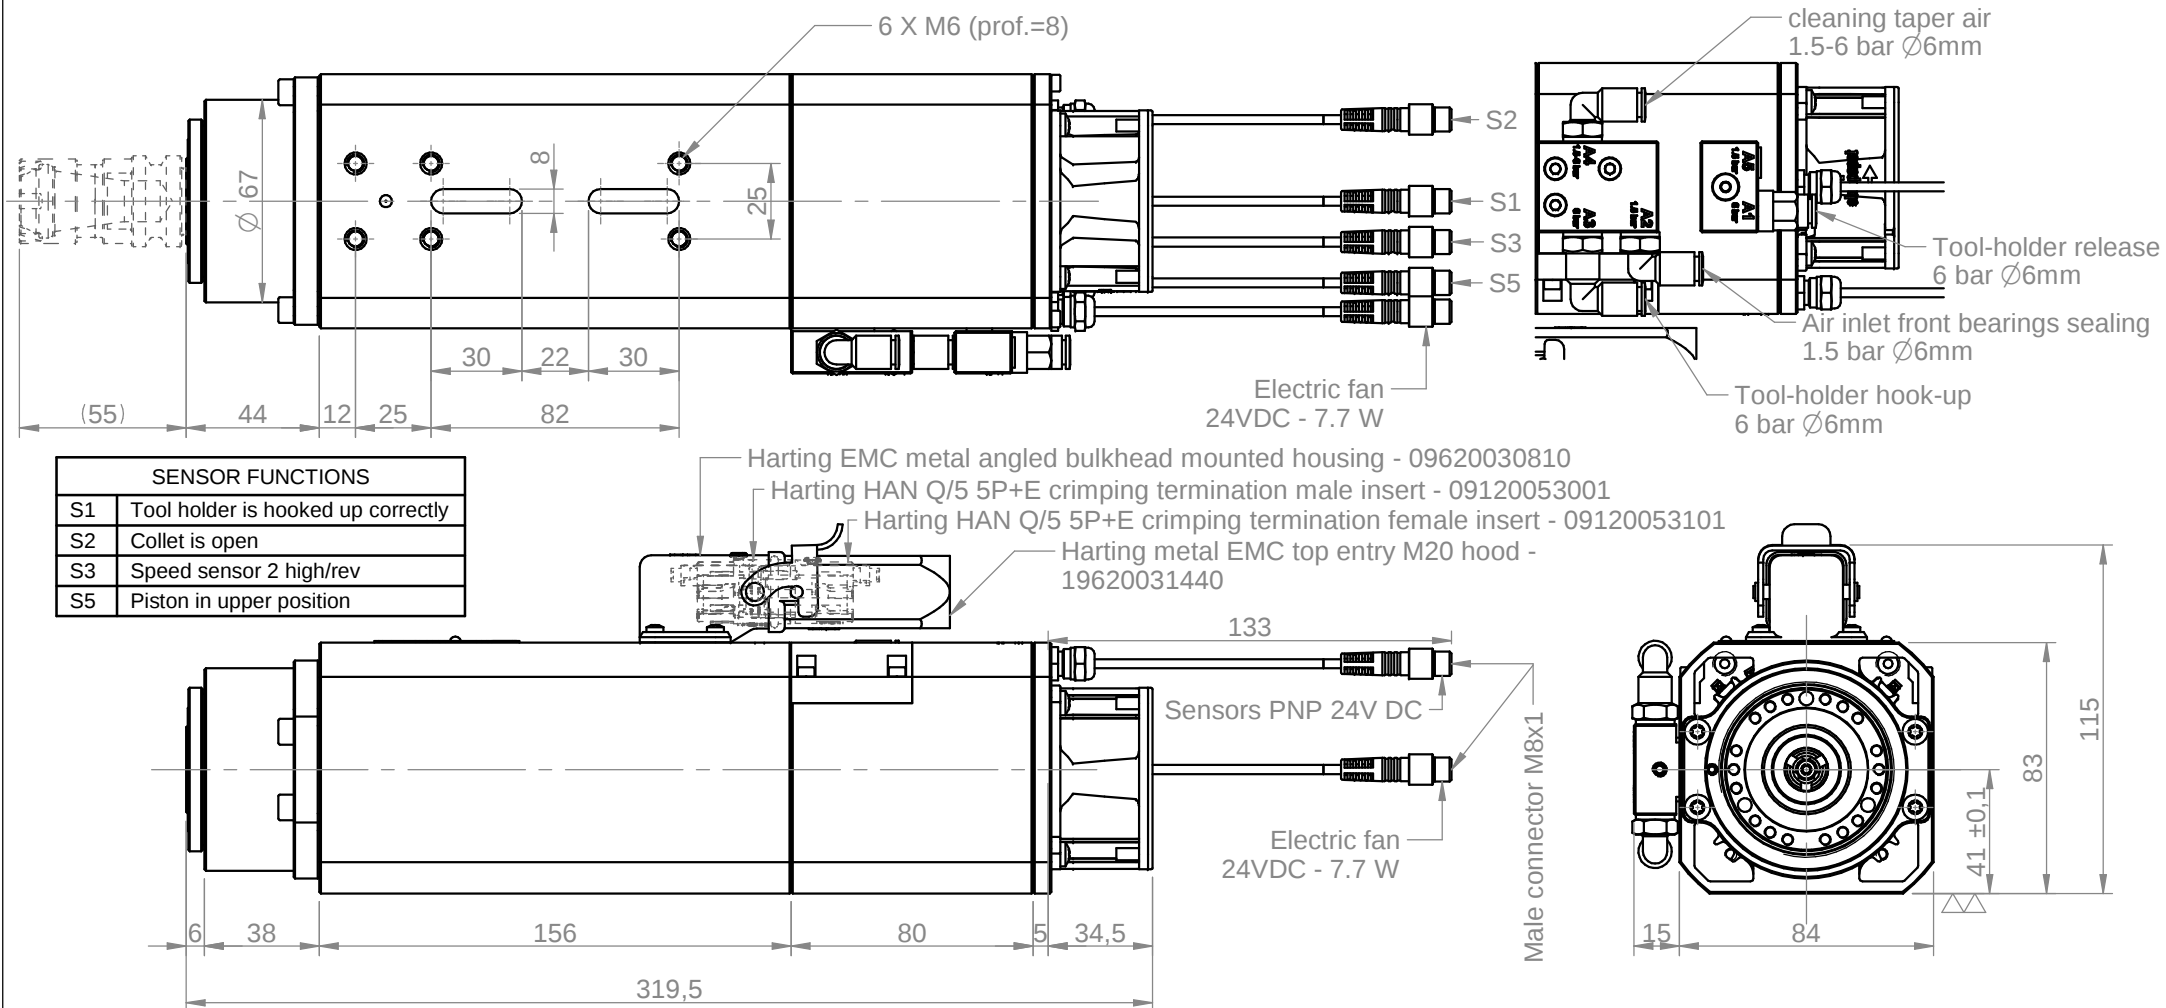

SENSOR FUNCTIONS	
S1	Tool holder is hooked up correctly
S2	Collet is open
S3	Speed sensor 2 high/rev
S5	Piston in upper position

PLUG CONNECTION

pin #1: PTC
pin #2: PTC
pin #3: U
pin #4: V
pin #5: W

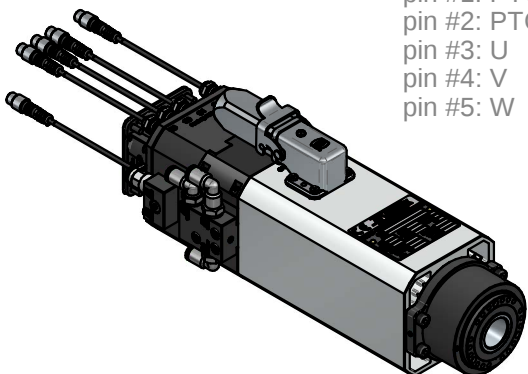

Power [kW] 1.1	Duty Cycle S6-60%	Base speed [rpm] 18000	Base freq. [Hz] 300	Base voltage Δ [V] 220	Absorb. Δ [A] 4.3	Base voltage Y [V]	Absorb. Y [A]	 Teknomotor S.r.l. Via Argenega 31, I-32038 Quero Vas (BL) www.teknomotor.com				
Power [kW]	Duty Cycle	Base speed [rpm]	Base freq. [Hz]	Base voltage Δ [V]	Absorb. Δ [A]	Base voltage Y [V]	Absorb. Y [A]					
Min speed [rpm] 6000		Max speed [rpm] 24000	Max freq. [Hz] 400	Protection IP54	Ins. Cl. F	Part number on nameplate COMTC410001						
Balancing according to ISO 1940 - G2.5 @ 24000 rpm		Balancing type		tool type 	full key	tool type 	half key		Peso / weight 5.77 kg	Title ATC41-A-DB-ISO20-SN		
rev. n° 00	description Emissione					date 10/05/2017	signature D. Bottarel	Customer Catalogo	Drawing code COMTC410001			
								Tolleranze non quotate: UNI EN 22768 fh Smussi non quotati: 0.5 mm Rugosità secondo UNI ISO 1302				
drawn - date D. Bottarel - 10/05/2017		approved - date S. Perli - 10/05/2017		checked - date S. Perli - 10/05/2017		sostituisce il			foglio / sheet 1 / 1	scala n.d.		A4
				sostituito dal								